



105 Bonnie Drive  
Butler, PA 16002  
724-283-4681  
724-283-5939 (fax)  
www.bwieagle.com


# PRODUCT INFORMATION BULLETIN

## LAMPMAN II Halogen Lamp Power Supply 200WATT DC to DC Converter MODELS 25-1900-12; 25-1900-24

### DESCRIPTION

The LAMPMAN II is the next generation of halogen lamp power supplies. The LAMPMAN II is a DC to DC converter now allowing the user to drive halogen lamps and other electronic accessories that require a well filtered, regulated DC supply. The unit has built-in protection for input transients and input polarity, as well as, output short circuit and over-voltage protection.

### DIMENSIONS

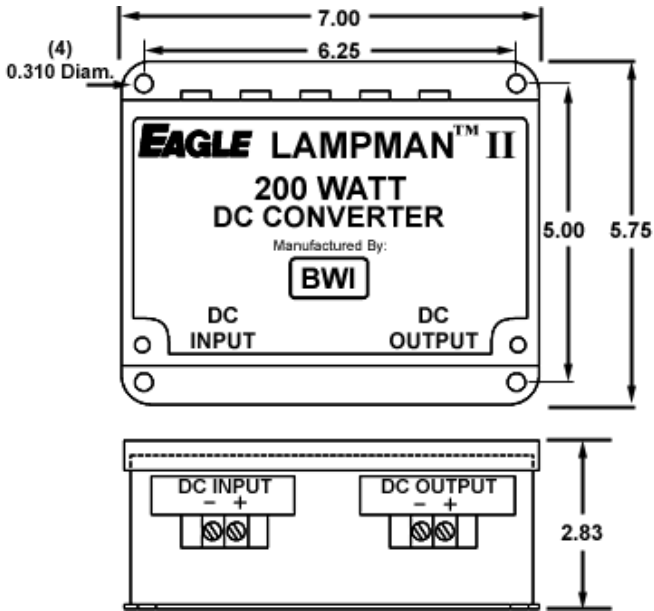

Note: Bolt Pattern Identical with Ocenco Models (6.25" x 5.00")



### SPECIFICATIONS & REPLACEMENT PARTS

Model 25-1900-12 Specifications	
DC Input Voltage	110VDC (67-185 VDC range)
Input Fuse Protection	MDL3.5
Input Connector	Terminal Strip
DC Output Voltage	Regulated 12VDC +/- 1%
DC Output Current	0-16.67 Amps (200W)
Short Circuit Protection	Automatic Restart
Replacement Parts	
Input Fuse	99-FUS-0003
Zener Diode	99-DIO-0010
Input Capacitor	99-CAP-0001
Input/Output PC Board	25-1902
Power Output Module	99-PWR-0024

Model 25-1900-24 Specifications	
DC Input Voltage	110VDC (67-185 VDC range)
Input Fuse Protection	MDL3.5
Input Connector	Terminal Strip
DC Output Voltage	Regulated 24VDC +/- 1%
DC Output Current	0-8.3 Amps (200W)
Short Circuit Protection	Automatic Restart
Replacement Parts	
Input Fuse	99-FUS-0003
Input/Output PC Board	25-1902-24
Power Output Module	99-PWR-0023

# LAMPMAN II

Halogen Lamp Power Supply  
200WATT DC to DC Converter

**MODELS 25-1900-12; 25-1900-24**

## LIMITED WARRANTY STATEMENT

BWI Eagle Inc. warrants the Lampman II, if properly used and installed, will be free from defects in material and workmanship for a period of six months after date of purchase. Said warranty to include the repair or replacement of defective equipment. This warranty does not cover damage due to external causes, including accident, problems with electrical power, usage not in accordance with product instructions, misuse, neglect, alteration, repair, improper installation, or improper testing. This limited warranty, and any implied warranties that may exist under state law, apply only to the original purchaser of the equipment, and last only for as long as such purchaser continues to own the equipment. This warranty replaces all other warranties, express or implied including, but not limited to, the implied warranties or merchantability and fitness for a particular purpose. BWI Eagle makes no express warranties beyond those stated here. BWI disclaims without limitation, implied warranties of merchantability and fitness for a particular purpose. Some jurisdictions do not allow the exclusion of implied warranties so this limitation may not apply to you. To obtain warranty service, contact BWI Eagle for a return material authorization. When returning equipment to BWI Eagle, the customer assumes the risk of damage or loss during shipping and is responsible for the shipping costs incurred.

---

DOCUMENT DATE: 16-Jul-19

---



105 Bonnie Drive  
Butler, PA 16002  
(724) 283-4681  
Fax (724) 283-5939  
[www.bwieagle.com](http://www.bwieagle.com)